

TSS102-R

Counter Electrical Semi-Automatic Thermosealing machine



STANDARD

- Realized in stainless steel and anodized aluminum
- 9 Sealing programs
- Electronic temperature control
- End of cycle visual and acoustic signal
- Automatic film unwinding
- Fast and easy mould change

OPTIONAL

- Available with **infinity** mould
- Solutions for trays with compartments
- Gas flushing
- Film micro-puncher
- Plexiglass film cover
- Pre-cut lids moulds
- Cutter for separating trays
- 110/120 Volt Change


TECHNICAL SHEET STANDARD CONFIGURATION

| | Measure Unit | TSS102-R |
|---|-----------------|-----------------|
| Machine dimensions (Width x Depth x Height) | mm | 295 x 450 x 555 |
| Weight | Kg | ~ 25 |
| Absorption | kW | ~ 0.75 |
| Electrical feeding | Volt / Hz | 230 / 50-60 |
| Sealing plate dimensions | mm | 195 x 260 |
| Maximum tray height | mm | 155 |
| Maximum film dimensions | mm | ø200 x 210 |
| Productivity | cycles / minute | 3-8 |

MOULD PRINTS

Approximate maximum tray sizes according to the number of prints.

It is possible to study custom-made solutions.

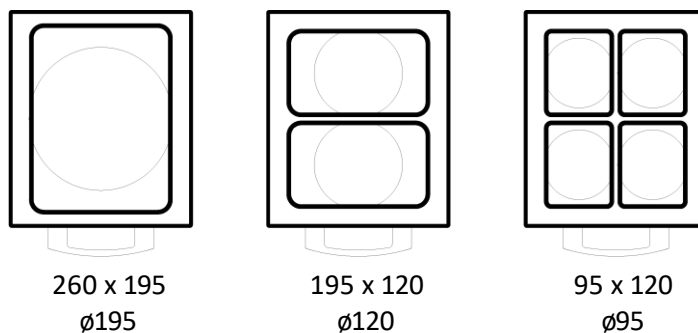

Tray size in mm

260 x 195
ø195

195 x 120
ø120

95 x 120
ø95